



IP65

iTECH

Оправа awaryjna LED  
Emergency LED fixture  
Аварийный светильник LED



220-240V~  
50/60Hz

Tc (K)  
5000



IP  
65

[mm<sup>2</sup>]  
5 x(1-1,5)



[°C]  
10-40°C





iTECH M2



ZESTAW MONT. P/T iTECH

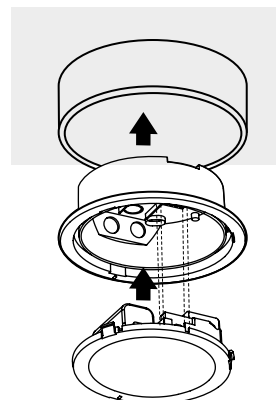

iTECH...ST

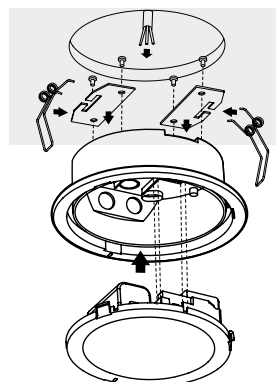

ZESTAW MONT. P/T iTECH



iTECH M5



iTECH C1



iTECH F2

**Kanlux**



**Kanlux**



iTECH M2 302 M ST W	27380	2	3	245	✓	+	ZESTAW MON. P/T iTECH	25438	✓
iTECH M5 105 M ST W	27381	5	1	223	✓	+	ZESTAW MON. P/T iTECH	25438	✓
iTECH C1 302 M ST W	27382	2	3	215	✓	+	ZESTAW MON. P/T iTECH	25438	✓
iTECH F2 105 M ST W	27383	5	1	212	✓	+	ZESTAW MON. P/T iTECH	25438	✓



PL

biały  
obudowa: tworzywo sztuczne

czas ładowania akumulatora 24h / oprawa posiada elektroniczne zabezpieczenie przed rozładowaniem akumulatora / oprawa awaryjna dwuzadaniowa, pracuje w trybie sieciowym i awaryjnym / czas pracy w trybie awaryjnym 1 lub 3 godziny / ST - test ręczny lub za pomocą zdalnego urządzenia testującego / Zestaw do montażu p/t iTECH

- czas pracy w trybie awaryjnym

EN

white  
casing: plastic

RUS

белый